



# TSCT 1104

## Titanium Supreme Coppersleeve Tweeter

Ø 110 mm, 4Ω



### SPECIFICATIONS

#### General Data

Overall Dimensions	<b>DxH</b>	110mm x 39mm(4" x 1.33")
Nominal Power Handling (DIN)	<b>P</b>	200 Watt
Transient Power 10ms		
Sensitivity 2.83V/1M		95 dB SPL
Frequency Response		See graph
Dome Material		Acuflex™ coated silk dome
Net Weight	<b>Kg</b>	0.5

#### Electrical Data

Nominal Impedance	<b>Z</b>	4Ω
DC Resistance	<b>Re</b>	4.19Ω
Voice Coil Inductance @ 1KHz	<b>LBM</b>	0.047mH

#### Voice Coil and Magnet Parameters

Voice Coil Diameter	<b>DIA</b>	28mm
Voice Coil Height		2mm
HE Magnetic Gap Height	<b>HE</b>	4mm
Max. Linear Excursion	<b>X</b>	± 1mm
Voice Coil Former		Titanium
Voice Coil Wire		Hexatech™ 100% Aluminum
Number Of Layers		2
Magnet System Type		Neodymium Vented
B Flux Density	<b>B</b>	
BL Product	<b>BXL</b>	


#### T-S Parameters

		Small Signal	1 volts
Suspension Compliance	<b>Cms</b>		
Mechanical Q Factor	<b>Qms</b>	2.44	2.41
Electrical Q Factor	<b>Qes</b>	0.55	0.53
Total Q Factor	<b>Qts</b>	0.44	0.43
Mechanical Resistance	<b>Rms</b>		3.37 ΩM
Moving Mass	<b>Mms</b>		
Eq. Cas Air Load (liters)	<b>VAS</b>		
Resonant Frequency	<b>Fs</b>	591 Hz	573 Hz
Effective Piston Area	<b>SD</b>		6.00 cm <sup>2</sup>


### FEATURES

- ▶ Underhung voice coil
- ▶ 2.1" Large Hexatech™ Aluminum voice coil
- ▶ Neodymium flat pancake magnet
- ▶ High power handling
- ▶ 110 mm IDR™ Improved Dispersion Recess
- ▶ Titanium VC Former
- ▶ Replaceable Acuflex™ dome/coil assembly
- ▶ Aluminum die-cast rear chamber


### UNIT DIMENSIONS

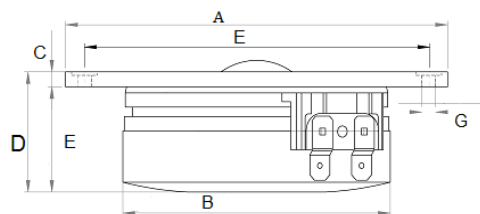

A - Overall diameter	110mm
B - Cut out diameter	72.8mm
C - Flange thickness	4.2mm
D - Overall height	33.8mm
E - Basket depth	29.6mm
F - Mounting holes location diameter	94mm
G - 6 Mounting holes, at 60° interval, inner hole diameter	Ø 3.7 mm

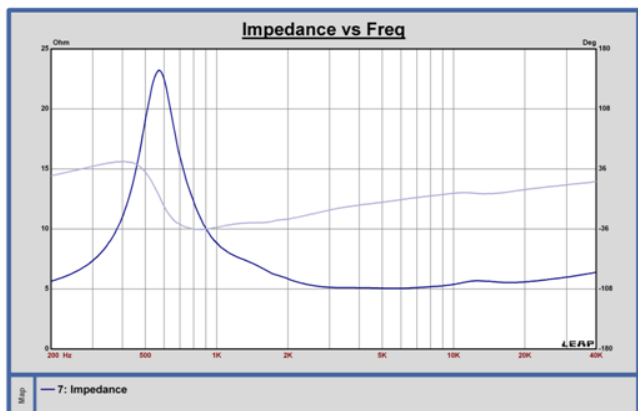

Driver is mounted rigidly in free air with no baffle or enclosure. Input signal is a stepped sinusoidal at 1VRMS. Impedance is measured using constant-voltage method. No smoothing was applied.

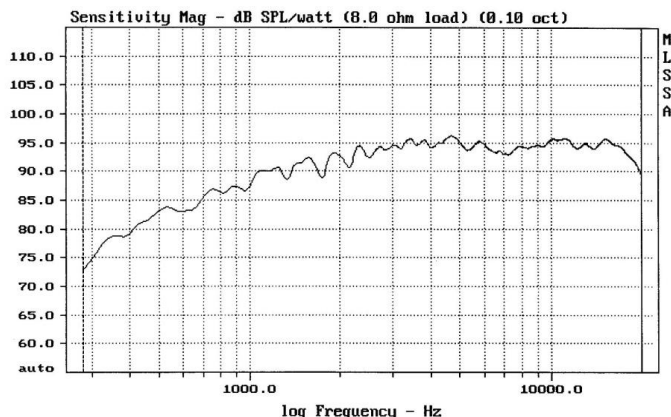

Driver was mounted rigidly on an IEC baffle. Microphone distance is 0.5m, input voltage 2.83VRMS and normalized to 1m. 1/12 octave smoothing was applied.

\*Morel operates a policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.